

# AGILIOS™ INSPECTIONS IN ALL SITUATIONS

The latest AGILIOS generation has been developed with the goal to perform "Inspections in all situations". The basis for this is the ultra-light design of the coiler with maximum stability for the use on the construction site as well as two battery packs which allow 6 hours of inspection without charging or power supply. This supports you to master inspection places with difficult access. With its variable control and placement possibilities the system offers working conditions which are as ergonomic as possible in all situations.


Modular AGILIOS sets offer you the freedom to decide whether you need a simple inspection system or a professional documentation solution. If you notice later on that you want to perform better, the AGILIOS offers you simple extension options.

With its exchangeable components - E-Box and reel - the AGILIOS is easy to service thus offering less downtime.



- ✓ Work anywhere thanks to 6h of battery life
- ✓ Easy to service: Reel and E-Box can be exchanged separately
- ✓ Many options: e.g. 30 - 100m rod

## AS DIVERSE AS YOUR DAILY CHALLENGES

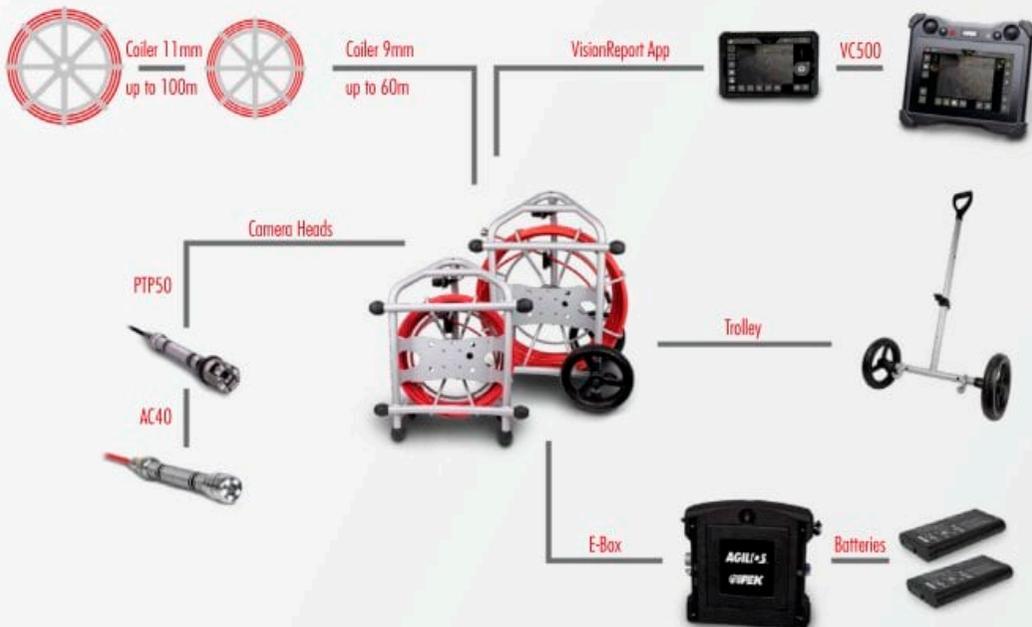

## THE NEW PUSH ROD SYSTEM AGILIOS XR RELIES ON THE PROVEN COMPONENTS

With the VC500 and the P&T camera PTP50 you are perfectly equipped for your inspection. The multifunctional, portable VC500 Control Panel is characterized by its low weight and its ergonomic shape for optimal user-friendliness and enables a catalog-based inspection. The P&T camera PTP50 convinces with its wide field of vision and high pipe bend mobility.

## VC500

### MOBILE AND UNCOMPLICATED OPERATION OF YOUR PUSH CAMERA SYSTEM

Document the whole inspection process via touchscreen, comment on videos and create standard-compliant reports at the push of a button.

- ✓ Suitable for daylight and construction sites (protection class IP55)
- ✓ Easy data exchange (USB, WiFi & LAN)
- ✓ Documentations in accordance with applicable standards (ATV, DWA, Isybau etc.)
- ✓ Modularly extendable software
- ✓ Touch operation



## PTP50

### HIGH PIPE BEND MOBILITY OF 90° FROM DN75

- ✓ Application range from DN60
- ✓ Wide field of vision, 100° Angle
- ✓ Rugged Design inter alia stainless steel front for more protection
- ✓ Integrated laser for crack and diameter measurement
- ✓ Integrated location transmitter (512 Hz, 640 Hz and 33 kHz)
- ✓ Panning range from -90° to +122°

